

工业轴流风机系列

Axial Fan



GLF豪华型方角扇 (带百叶)
GLF Axial Fan (With shutter)



GLF-B豪华型方角扇 (加装后网不带百叶)
GLF-B Axial Fan (With both side grilles)



风叶(Blade)

风叶—采用优质铝板压铸而成, 具有重量轻, 造型美观大方, 档次高, 防锈等优点

Blade—Adopts punching high quality aluminum, and it has the advantages of light weight, beautiful and dignified in appearance, high-class, and antirust.



百叶(Shutter)

百叶—采用优质镀锌钢板精制而成, 具有自动启闭, 防风, 防锈等优点

Shutter—Adopts high quality galvanized steel, and it has the advantages of automatically controlled in opening and closing, hurricane lamp and waterproof.

> GLF 系列方角扇

GLF Series Axial Fan

- 噪音低, 风量大, 耗电少, 安装方便
- 可根据需要, 选择安装百叶窗式或者双面防护网式。百叶窗式可随风机启动或关闭自动开合, 达到防尘, 防水, 美观的效果; 双面防护网式与百叶窗式性能相同, 更加简单。
- 适用于不含易燃易爆以及腐蚀性气体之工厂, 仓库, 养殖场等。
- Low noise, big airflow, power saving, and easy to install.
- Shutter type or grill type can be chosen as per using requirement. Fan shutters automatically open or close following with the fan starts or stops running, which achieves dust-proof, water-proof, and appearance clean; grill type has the same performance as shutter type, more simple.
- Suitable for ventilation in warehouses, animal farms, factories and more.




叶托(Blade supporter)

叶托—采用高强度铝合金压铸而成, 具有重量轻, 强度高, 组装快捷及防锈等优点

Blade supporter—Adopts high intensity and die-casting aluminum, and it has the advantages of light weight, high intensity, easy to install and antirust.

外形尺寸图

Outline dimensions

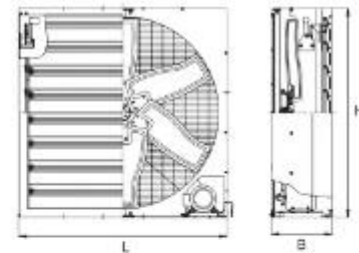

型号 Model	规格 Diameter of blade (mm)	尺寸 L/H/B Outline dimensions (mm)	额定电压 Voltage & frequency	功率 Power (KW)	转速 Speed (rpm)	风量 Air volume (m ³ /min)	噪音 Noise (dB)	认证 Certificates
GLF5#	500/20"	600/600/400	380V/220V/50Hz	0.55	1400	117	72	CB CE SASO G-MARK
GLF5.6#	560/22"	750/750/400	380V/220V/50Hz	0.45	960	133	65	
GLF7#	700/28"	850/850/400	380V/220V/50Hz	0.45	960	230	71	
GLF8#	800/32"	900/900/400	380V/50Hz	0.37	450	267	59	
GLF9.5#	950/38"	1060/1060/400	380V/220V/50Hz	0.75	450	533	60	
GLF11.2#	1120/45"	1220/1220/400	380V/220V/50Hz	0.75	450	617	63	
GLF12.5#	1250/50"	1380/1380/400	380V/220V/50Hz	1.1	450	742	65	